

**NEW WORK PLAN** 

SCALE: 1/4" = 1'-0"

## 

### THIRD FLOOR CEILING & LIGHTING PLAN SCALE: 1/4" = 1'-0" NORTH

### 8 1/2" 9 9 1-1-1/2" 9 10 REFG.

### PARTIAL PLUMBING PLAN

SCALE: 3/8" = 1'-0"

LEGEND SHEET A2.

MATERIAL & COLOR LEGEND SHEET A2.

### CONSTRUCTION NOTES

- 1 FLOORS, WALLS & CEILING TO RECEIVE NEW FINISHES. SEE FINISH SCHEDULE.
- $\langle 2 \rangle$  Drill 2"ø hole & insert grommet rings as shown in New Countertop.
- RE PLUMB NEW WASTE AND WATER PIPING TO NEW SINK FIXTURE. SEE PARTIAL PLUMBING PLAN THIS SHEET.
- (4) NEW 2x2 CEILING TILE, GRID, HVAC DIFFUSER, GRILLS & LIGHTING. SEE FINISH SCHEDULE. RECESS CEILING TILE TO EXPOSE ENTIRE WINDOW OPENINGS.
- (5) REPLACE EXISTING HVAC GRILLES WITH NEW. RECONNECT TO EXISTING DUCTWORK.
- (6) INSTALL VA PROVIDED 2x4 LIGHT FIXTURES CONNECT TO NORMAL LIGHTING CIRCUIT.
- $\langle 7 \rangle$  INSTALL NEW LIGHT SWITCH TO CONTROL 2x4 LIGHT FIXTURES.
- (8) INSTALL NEW 1/2" COPPER SUPPLY PIPING TO NEW FIXTURES. ALL PIPING SHALL HAVE A MINIMUM 1/2" INSULATION. REFER TO MFG. CUT SHEETS FOR LOCATION TIE IN POINT AS NEEDED. WORK INCLUDES ALL CONNECTIONS AND MOUNTING SUPPORT HANGERS AS REQ. IN ACCORDANCE WITH LOCAL CODE.
- 9 INSTALL NEW 1-1/2" SEWER PIPE FROM FIXTURES TO EXIST. SEWER PIPE. PROVIDE REDUCERS AS REQ. REFER TO MFG. CUT SHEETS FOR LOCATION TIE IN POINT. WORK INCLUDES REDUCER CONNECTIONS AND ALL MOUNTING SUPPORT HANGERS AS REQ. IN ACCORDANCE WITH LOCAL CODE. INSTALL & TIE NEW VENT PIPE TO NEAREST RISER.
- (10) RE-USE EXISTING WATER LINE AND DRAINS TO CONNECT NEW FIXTURES & SHOWER.
- (11) INSTALL WATER LINE CONNECTOR WITH INDIVIDUAL SHUTOFF FOR BUILT IN REFRIGERATOR ICE MACHINE UNIT.

	PLUMBING FIXTURE SCHEDULE										
P#	DESCRIPTION	CW	HW	SAN	VENT	TRAP	NOTES				
P-105	COUNTERTOP S/S SINK	1/2"	1/2"	1-1/2"	1-1/2"	Р	SEE NOTES 1, 2, 3				
ADDITIONAL NOTES:											

NORTH

1. PLUMBING TIE INS OF NEW FIXTURES WILL REQUIRE MODIFYING SUPPLY AND DRAIN LINES, CORING NEW HOLES THRU WALLS AND FLOORS, ETC. AND SHALL BE INCLUDED AS PART THE INSTALLATION.

**ROOM FINISH SCHEDULE** 

2. INCLUDES SINGLE BOWL STAINLESS STEEL SINK, GOOSENECK SPOUT FAUCET & PULL OUT SPRAY HEAD.

3. FIXTURE SHALL BE RATED TO DISPENSE WATER AT A RATE OF 2.5 GALLON PER MINUTE (GPM).

RM.NO.	ROOM NAME	FLOOR FINISH	BASE	WALLS	CEILING	NOTES
3C172	LOUNGE	RES-1,2	RB	P1,2	ACT	SEE NOTES 1, 2, 3, 4, 5.
	MATE	RIAL FINISH	H LEG	END_		
	JSTIC CEILING TILE ( ANT FLOORING (RES)	•	ER BASE (P)	(RB)		
		(ACT) SHALL BE	2x2 LA	Y IN TYP	PE, WASHA	BLE, MOLD, BACTERIA & MILDEW RESISTANT. INSTALL
	(P) 1 COAT SHERV I. COLOR REFER TO				TEX PRIM	ER, 2 COATS SHERWIN WILLIAMS SEMI GLOSS LATEX
3. RUBB	ER BASE (RB) SHAL	L BE 5-1/4" I	HIGH WIT	н сопто	UR, COLC	OR — MANNINGTON 918 FLAX.
	IANT FLOORING (RES	S) TWO COLOR	PATTERN	T.B.D. R	EFER TO	FLOOR PATTERN LAYOUT AND MATERIAL & COLOR

5. ONE ACCENT WALL SHALL BE PAINTED \$\fop2 \text{THIS ROOM. ENTIRE DOOR & FRAME SHALL BE PAINTED \$\fop5 \text{ REFER TO}

		SE	ΞV	VO	RK SCH	CASEWORK NOTES				
CASEWORK	ORK MANUFACTURER'S		SIZE		CASEWORK TYPE	ADJ. DOOR	DOODS	DDWDS	REMARKS	GENERAL CONTRACTOR TO VERIFY SIZE OF COUNTERTOPS.
NUMBER	SERIES	SERIES W"	Н"	D"	CASLWORK TIFL	SHELF		DIVMIVO	ILLIVIAINNS	ALL CABINET JOINTS ARE TO BE FLUSH WITHOUT OVERLAPS.
B1		18"	36"	23"	DRAWERS	_	_	4		FIXTURES AND CONNECTIONS BY PLUMBING CONTRACTOR.  COUNTER TOPS SHALL HAVE 4" H BACK SPLASH, FIELD JOINT & MARINE EDGE
B2		18"	36"	23"	DOOR/DRAWER	1	1	1		COUNTER TOPS & BACKSPLASH SHALL SHALL BE SOLID SURFACE CORIAN.
В3		18"	36"	23"	SINK CABINET	_	1	-		PROVIDE REAR, FRONT & CORNER FILLERS (SIZE VARIES) AS REQUIRED.
B4		24"	36"	23"	DOOR/DRAWER	_	1	1		ALL CASEWORK IS TO HAVE SOLID BACKS.  ALL DIMENSIONS SHOWN ON CASEWORK SCHEDULE ARE NOMINAL DIMENSIONS.
W1		30"	18"	16"	HINGED DOORS	1	2	_		
W2		18"	18"	16"	HINGED DOORS	1	2	_		
W3		24"	16"	16"	MICRO WAVE	_	_	_		

### CEILING PLAN LEGEND


2x4 LED LIGHTING (VA PROVIDED)



RETURN VENT

SPRINKLER HEAD

SUPPLY VENT

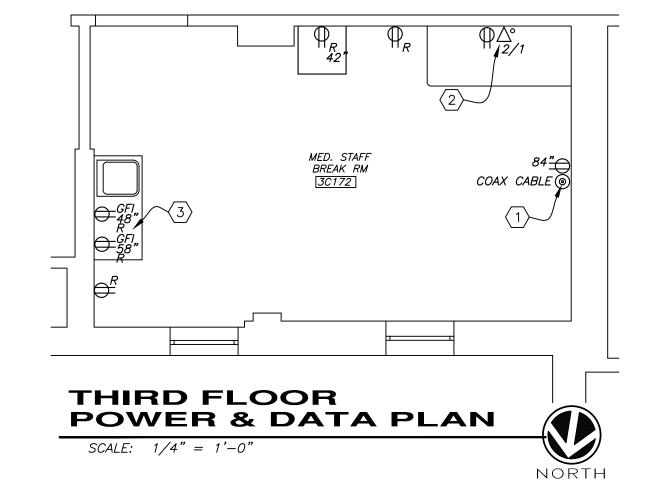

### ○ ELECTRICAL NOTES

- (1) INSTALL NEW COAX CABLE OUTLET IN WALL. REQUIRES ROUTING A NEW CABLE ABOVE CEILING TO CLOSEST CLOSET COORDINATE WORK WITH VA COR AND ELECTRICAL DEPT.
- 2 INSTALL NEW DATA/COMM OUTLET. PER DATA NOTES REFERENCED ON SHEET E1.
  3 INSTALL NEW ELECTRIC OUTLETS PER ELECTRIC/DATA NOTES AND LEGEND REFERENCED ON SHEET E1. TYPICAL ALL NEW OUTLETS.

# THIRD FLOOR DEMOLITION PLAN SCALE: 1/4" = 1'-0" NORTH


### O DEMOLITION NOTES


- ENTIRE ROOM TO RECEIVE NEW FINISHES. REMOVE EXISTING VCT FLOORING. REMOVE COVE BASE WHERE IT EXISTS. REMOVE EXISTING LIGHTING, SUSPENDED CEILING TILE & GRID. PATCH FLOORS & WALLS AS REQUIRED FOR NEW FINISH. REMOVE WALL HUNG ITEMS AND STORE APPROPRIATELY AS DIRECTED BY COR FOR RE—INSTALLATION. APPLY ARDEX SELF LEVELING CONCRETE UNDERLAMENT AS REQUIRED.
- REMOVE LOCKERS, PARTITION WALL, CASEWORK & PLUMBING FIXTURE. PATCH FLOORS & WALLS AS REQUIRED FOR NEW FINISH. PLUMBING CONTRACTOR TO REMOVE EXIST. PLUMBING FIXTURES AND PREPARE TO RECEIVE NEW FIXTURE AS SHOWN.
- REMOVE HEATING COIL UNIT COMPONENTS AS NEEDED TO CLEAN THOROUGHLY & REFURBISH UNIT FOR RE—USE. EXTERIOR FINISH SURFACE SHALL BE CLEANED SANDED, PATCHED AS REQUIRED AND PAINTED WITH EPOXY BASE PAINT.
- REMOVE PATIENT HEADWALL UNIT. OXYGEN, MEDICAL AIR & VACUUM LINES SHALL BE DISCONNECTED, CAPPED & CERTIFIED COMPLIANT BY REGISTERED MEDICAL GAS TECHNICIAN. DISCONNECT NURSE CALL, COMM LINES AND ELECTRIC BACK TO NEAREST JUNCTION BOX.
- DISCONNECT & REMOVE ALL SURFACE & POLE MOUNTED OUTLETS, COM DEVICES AND ASSOCIATED EXPOSED CONDUITS. EXISTING TV OUTLETS SHALL BE REMOVED, AND HOLES PATCHED OVER TO RECEIVE PAINT

GROUND FLOOR

-1ST FLOOR LOCATION

LOCATION

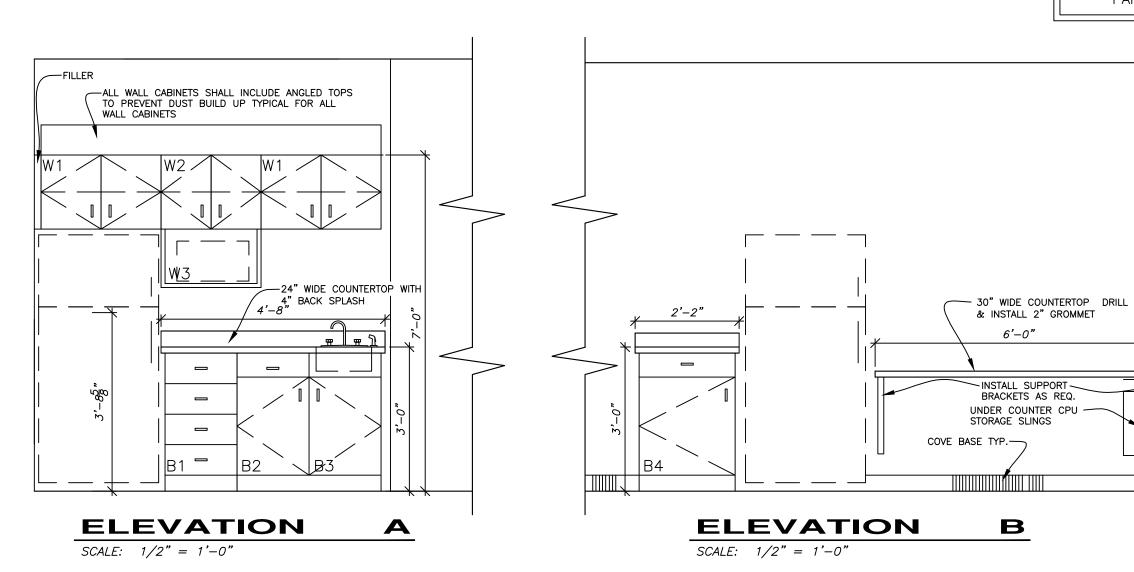

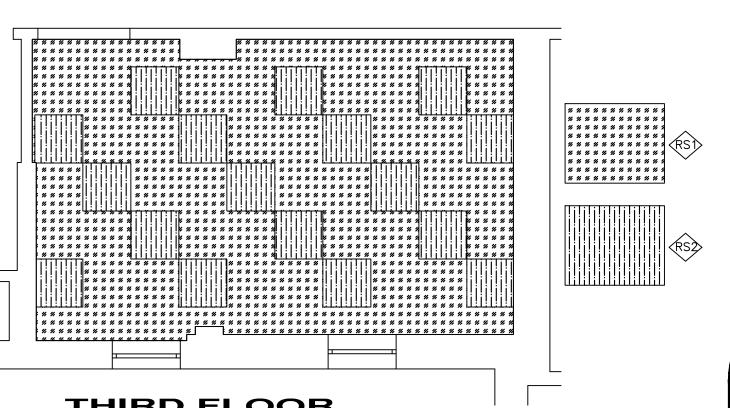

### THIRD FLOOR FLOOR PATTERN PLAN

SCALE: 1/4" = 1'-0"

NOTE: FLOOR TILE LAYOUT REPRESENTS "EXAMPLE ONLY". FINAL FLOOR PATTERN SHALL BE FIELD DETERMINED BY VA INTERIOR DESIGN

REPRESENTATIVE.

WA MEDICAL CENTER - 1540 SPRING VALLEY DRIVE - HUNTINGTON WV 25704

12

23

